

Auto Reset / Battery Backup / Auxiliary Contacts

VERSA'LARM™ - Flood Alarm

Leading Edge Design



Early Warning - Notification While You're Away - Power Outages - Expandable

A standard Versa'larm™ - Flood Alarm includes an alarm panel and a WaterSpotter™ sensor. The sensor may be up to 2,500 feet from the Versa'larm where water needs to be detected. Receive immediate notification of threatening water levels by connecting an Auto Dialer to the Versa'larm. The Auto Dialer will call four contact numbers when an alarm occurs. Install a standard 9 volt battery to ensure the system will operate during power outages or accidental unplugging of the unit. Once the standard Versa'larm - Flood Alarm is installed, add accessories to create a total "Home Protection System." Add up to six WaterSpotters™ for complete property protection. Add the low temperature switch option with an Auto Dialer and get Furnace Failure notification while away from home.

1 Stand-Alone Alarm

Install the standard Versa'larm™ - Flood Alarm

(Includes one Versa'larm™ and one WaterSpotter™)

A standard alarm may be all that you need. Expand at any time if you want additional coverage, simply add accessories for customized protection.

Typical Applications:

Floor Drain - Water Heater - Laundry Room - Sink/Dishwasher
Office/Computer Room - Utility Room




Floor Drain

2 Expanding the Versa'larm™

At anytime you can expand your stand-alone alarm system for total home protection

Alert others when a sump pump fails, furnace fails or flooding occurs - NO MONTHLY FEES! The Auto Dialer sequentially dials any combination of four telephones, cell phones or pagers and delivers a recorded alarm message.

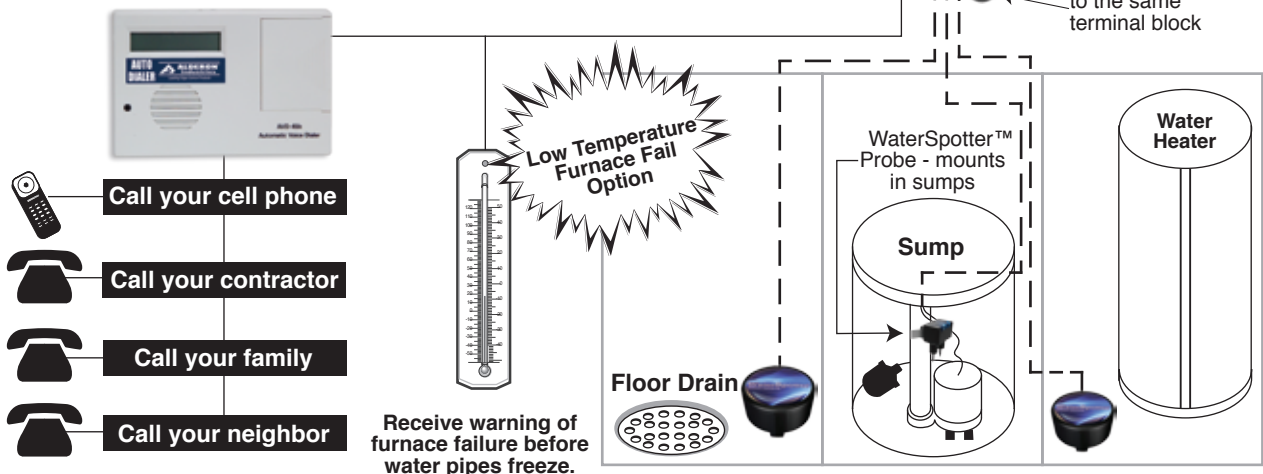

Leading Edge Control Products

Alarm Systems

Control Panels

Float Switches

Leak Detection Systems

Auto Reset / Battery Backup / Auxiliary Contacts

VERSA'LARM™ - Flood Alarm

Specifications



WaterSpotter™		VERSA'LARM™	
<p>Voltage 9-12 VDC</p> <p>Caution Connect only to an Alderon Versa'larm™ monitoring system</p> <p>Operating Current 3 mA</p> <p>Switching Current 500 mA maximum</p> <p>Probes Stainless steel</p>	<p>Features</p> <p>Thin Film Water Detection Less than 1/16 inch, for early warning before damage occurs</p> <p>Solid State Circuitry No moving parts, no maintenance</p> <p>Epoxy-Encapsulated Circuit Waterproof-tamperproof-trouble free</p> <p>Stainless Steel Probes Resist rust and corrosion</p> <p>Easy Mount Enclosure Mounts on flat surfaces</p> <p>3-year Warranty</p>	<p>Primary Power 120 VAC, 60 Hz</p> <p>Secondary Power Class 2, 9-11 VDC, 500 mA</p> <p>Auxiliary Contacts Normally Open Class 2, 24 VDC/24 VAC (50/60Hz), 100 mA maximum</p> <p>Battery Standard 9 VDC (not included)</p> <p>Buzzer 103 db @ 2 ft</p> <p>Switch 9 VDC, 200 mA minimum (Signaling device) Single pole, single throw</p>	<p>Features</p> <p>LED Light & Buzzer Excellent audio/visual in poor conditions</p> <p>Test/Silence Switches, Automatic Buzzer Reset Guarantees alarm</p> <p>Battery Backup Protection during power outages</p> <p>Alarm Auxiliary Contacts Connect to Auto Dialers Remote alarms</p> <p>Connect Up to Six WaterSpotter™ Sensors Flexibility for zone protection</p> <p>Type I Enclosure with External Mounting Flange Mounts in minutes</p> <p>Indicator Lights Indicates power and alarm status</p> <p>CSA Listed / 3-Year Warranty United States and Canada Guaranteed Safety and Performance</p>

Order Numbers



Versa'larm™



WaterSpotter™



WaterSpotter™ Probe



Furnace Fail



Auto Dialer

Part Number	Description
7003	Versa'larm™ - Flood Alarm (includes WaterSpotter™)
<i>Accessories (Expanded Applications)</i>	
7008	WaterSpotter™ (Flood Sensor)
7009	WaterSpotter™ Probe (Sump Sensor)
7018	Low Temperature Sensor (need to order 7006 or 7019 also)
7006	Auto Dialer: one common message used for all sensors
7019	Auto Dialer: two different messages, one for water sensor and one for furnace fail



Leading Edge Control Products

CS1003A

Alarm Systems

Control Panels

Float Switches

Leak Detection Systems

PO Box 827 • Hawley, MN 56549 • (218) 483-3034 • Fax (218) 483-3036 • www.alderonind.com