

Indoor / Outdoor Tank Alarm

VERSA'LARM™ - I/O

Leading Edge Design




High Integrity Design - Environmentally Safe

The Versa'larm I/O™ is dual rated for either indoor or outdoor use. Type 1 - Indoor use. Type 4X - Outdoor use, waterproof against pressurized wash-downs. The auto-reset feature automatically resets the buzzer when alarm condition clears. Patented mechanical float switch eliminates hazardous mercury.

Applications

- ▶ Lift pump chambers
- ▶ Holding tanks
- ▶ Sump pump basins
- ▶ Water tanks
- ▶ Septic tanks

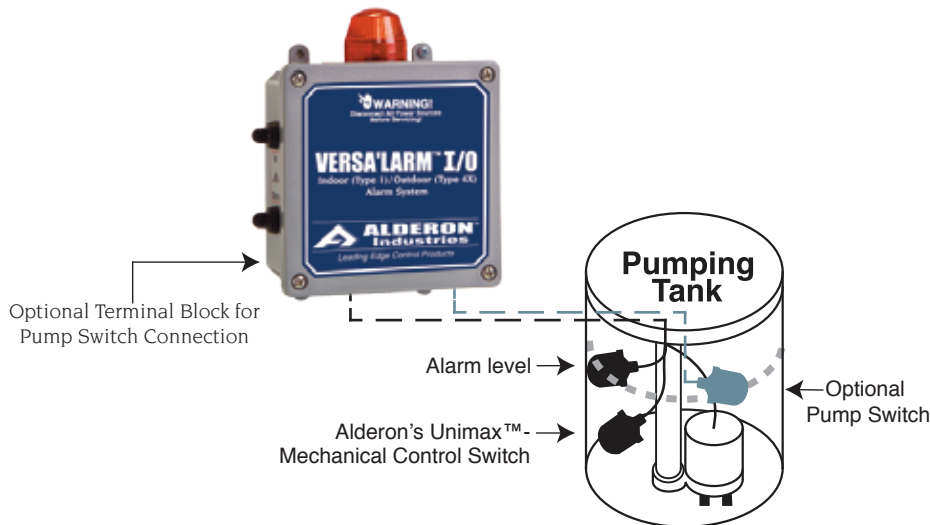

The Versalarm™ I/O is powered by 120 VAC. When the float switch closes the buzzer and light will be activated. Pressing the silence button silences the buzzer. When the alarm condition is cleared, the system automatically resets itself.

Features

Automatic Buzzer Reset
Eliminates errors

Red Polycarbonate Beacon
High visibility

Alarm Buzzer
Loud 100 db warble

Terminal Block
Fast connections

Fuse - 1 Amp
Protects internal wiring

Entire System Dual Rated
Type 1 and 4X
Indoor or outdoor use

Test/Silence Switches
Easy service

Internal Wiring Diagram
Quick installation

3-Year Warranty
Guaranteed performance

UL Listed
Listed by UL for safety and performance



Leading Edge Control Products

Alarm Systems

Control Panels

Float Switches

Leak Detection Systems

Indoor / Outdoor Tank Alarm


VERSA'LARM™ - I/O

Specifications




Versa'larm™ I/O

Primary Power: 120 VAC, 50/60 Hz
Watts: 15 watts
Fuse: 1 amp fast-acting type AGC
Buzzer: 100 db warble
Switch: 120 VAC, 1 amp minimum
 (Signaling device) Single pole, single throw
Enclosure: PVC UL type 4X
System Rating: UL type 1 and 4X

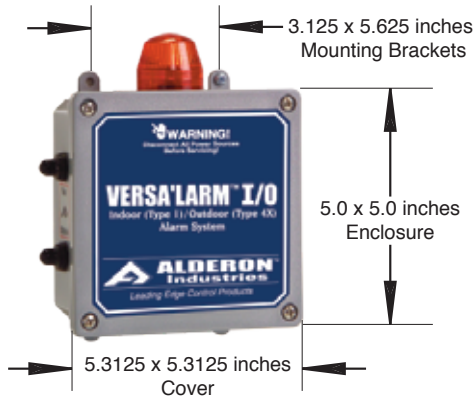

Unimax™ Float

Electrical: 4 amps, 120/230VAC
Operating Temperature: 0-140 F
Cable: SJOOW-flexible, 18 gauge, water resistant, rubber (CPE)
Float Housing: High impact PVC
Switch Arrangement: Single pole, single throw
Switching Differential: 10 degrees total

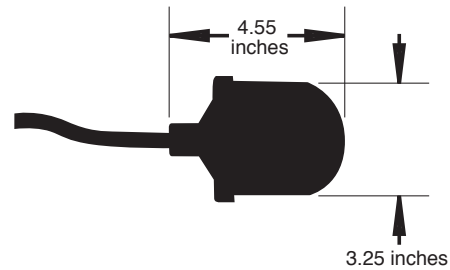

Order Numbers

Versa'larm™ I/O - Alarm is dual rated and includes auto-reset. Type 1 - Indoor and Type 4X - Outdoor.



Versa'larm™ I/O



Unimax™



Optional Terminal Block

Part Number	Description
7031	Versa'larm™ I/O - Tank Alarm (alarm panel only)
7004	Versa'larm™ I/O - Tank Alarm with 15' Unimax™ Float Switch (High Level)
7032	Versa'larm™ I/O - Tank Alarm with 20' Unimax™ Float Switch (High Level)
7033	Versa'larm™ I/O - Tank Alarm with 15' Unimax™ Float Switch (Low Level)
B	Optional Terminal Block for Pump Switch Connection (Place "B" after Part Number)
C	Optional Auxiliary Alarm Dry Contacts (Place "C" after Part Number)



Leading Edge Control Products

CS1004A

Alarm Systems

Control Panels

Float Switches

Leak Detection Systems

PO Box 827 • Hawley, MN 56549 • (218) 483-3034 • Fax (218) 483-3036 • www.alderonind.com